

EZ-Lock™ Bike Locker

PRODUCT CODE

EZ-LOCKER

MATERIALS

- 18 Gauge Sheet Metal ASTM A591
- Electrolytic Zinc Coated

FINISHES

- Black Powder Coated
- Galvanized available upon request

OVERVIEW

A locker bank will consist of:

- 1x outer wall
- 1x inner/joint wall
- 1x or 2x doors


HINGES

- ASTM A314 or equivalent Stainless-Steel Billets



DIMENSIONS

- 36" (91.5 cm)
- 30" (76.0 cm)
as shown in drawing below
- 24" (61.0 cm)

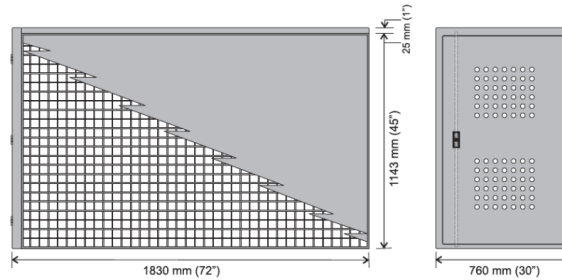

Height and Length can be adjusted pending local bylaws/ordinances

INSTALLATION

- Floor must be level
- Must be installed against existing drywall or concrete wall to function as backing
- Lockers may be stacked as required
- Contact us for any additional details

ROOF OPTIONS

- 18 Gauge / Flat
- 6 mm Bar Mesh
- 9 Gauge Expanded Steel Mesh

DOOR OPTIONS

- 1x Single Flat Door within a frame made of 18 Gauge Sheet Metal ASTM A591
- Double Door to park two bikes with partition

DOOR FRONT STYLES


- Louvered
- Perforated
- Solid (*recommended*)

LOCKING MECHANISM

- Simple Padlock System
- Locking handle with 2-point locking rods ASTM B221

EXTERIOR / INSIDE WALL OPTIONS

- 18 Gauge Sheet Metal ASTM A591
- 6 mm Bar Mesh
- 9 Gauge Expanded Steel Mesh

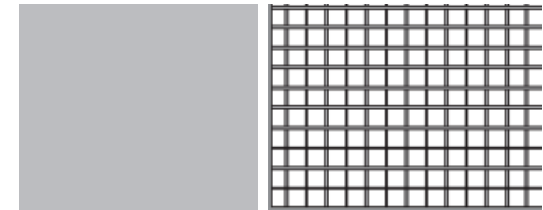

Drawings are for information purposes only and while accurate at the time of creation, Kinetic Parking Solutions, Inc. must confirm its accuracy prior to submission.